


RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

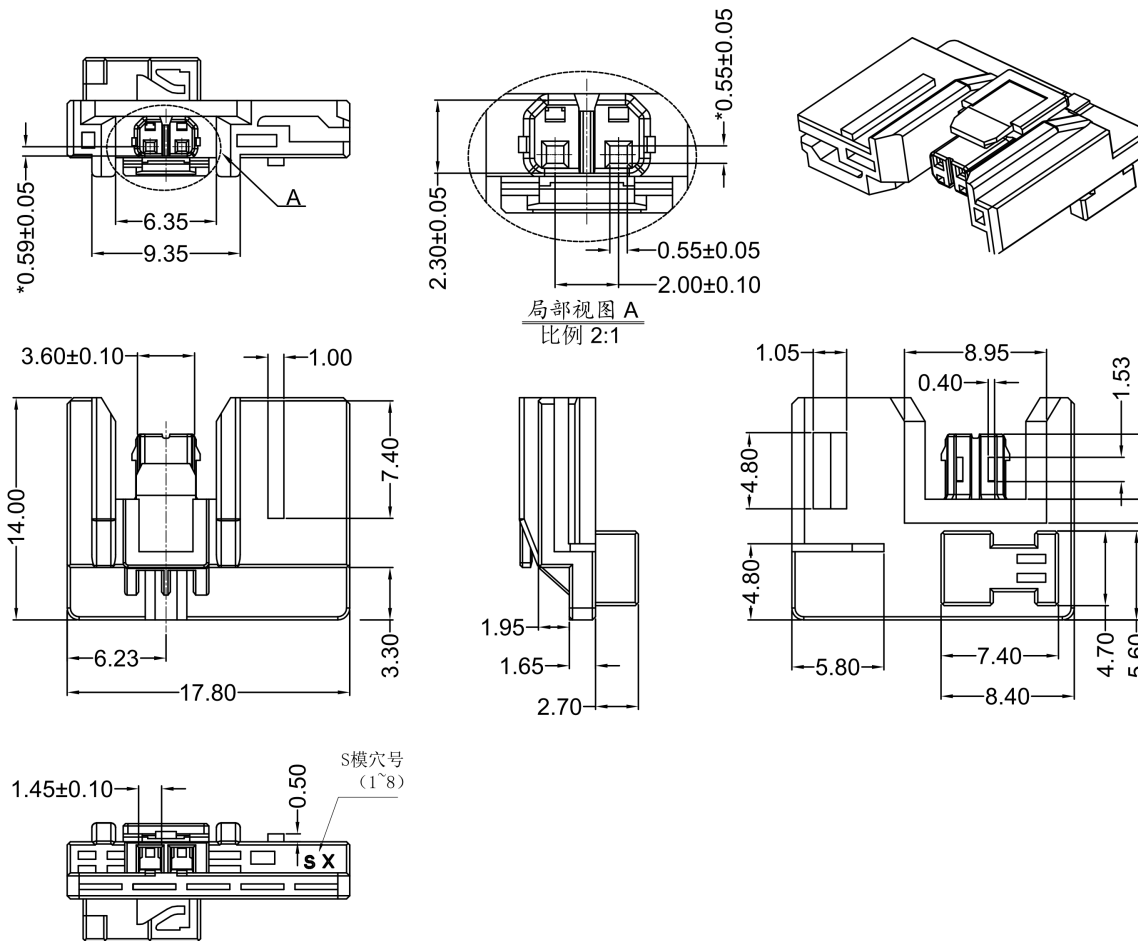

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40° C~+105° C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

HRS-2033 H - 02 - N0 HF XX

① ② ③ ④ ⑤ ⑥

- ① Series No.
② Category: H-HSG
③ Connector Type: M-Male HSG
④ Row No.-Pin No: 2xXX-Double Row 2xXXPin
⑤ Plastic material: N0- PA66 UL94V-0
⑥ Color: NC-White;BK-Black;

A							GENERAL TOLERANCE		 Horus Int. Electronics. Co., LTD. HorusTech Electronics. Co., LTD.				PART NO. HRS-2033H-02-N0HFNC				
							.X ±0.35						TITLE 2.00 mm Crimp Style Connectors				
							.XX ±0.25										
							.XXX ±0.15		APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
							X." ±2°										
	DATE	REV	ECN NO	DESCRIPTION	MODIFY	APPROVAL	PROJECT 		Kim Huang	Robing Bi	Larry Yang	2020.07.02	mm	1:1	1/1	A0	A-000
	1		2	3		4	5			6		7	8				