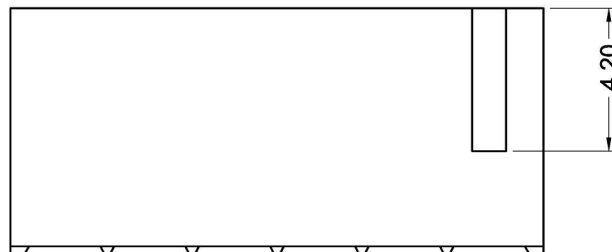
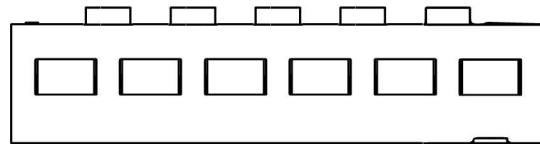
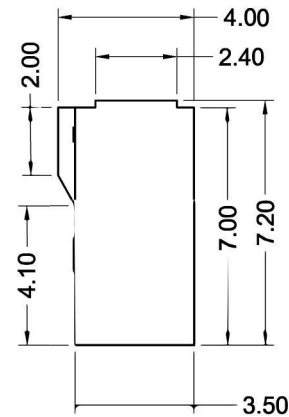
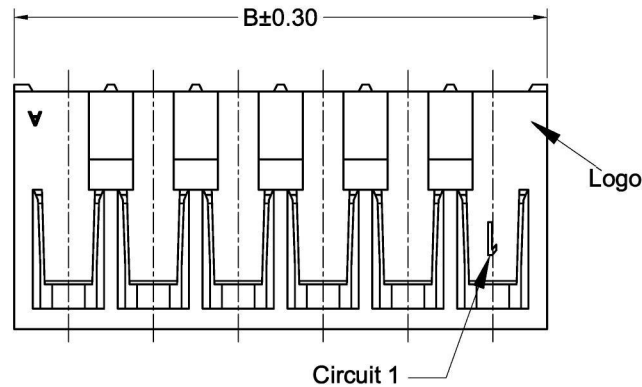
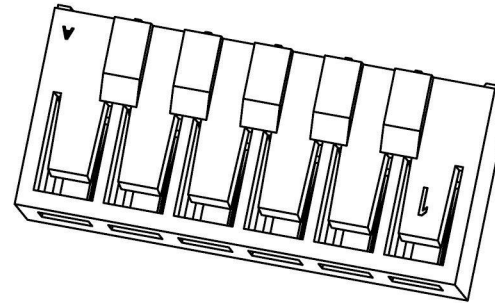
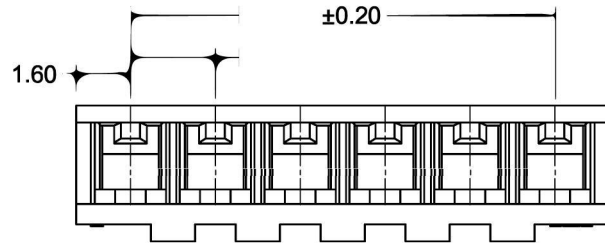


RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management Rules

**Specifications :**

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Suitable HRS Terminal: HRS-9026TXV

HRS-9026 H V-XX X-N0 NC**① ② ③ ④ ⑤ ⑥ ⑦**

- ① Series No.
- ② Category: H-HSG
- ③ Connector type: V-180°
- ④ Row No.-Pin No per row: XX-02P~15P
- ⑤ Special No.:
- ⑥ Material: N0-PA66 UL 94V-0
- ⑦ Color: NC-Natural Color

Poles	Dimensions (mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	5.70	10	22.50	25.70
03	5.00	8.20	11	25.00	28.20
04	7.50	10.70	12	27.50	30.70
05	10.00	13.20	13	30.00	33.20
06	12.50	15.70	14	32.50	35.70
07	15.00	18.20	15	35.00	38.20
08	17.50	20.70			
09	20.00	23.20			

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT



Horus Int. Electronics. Co., LTD.
Horustech Electronics. Co., LTD.

APPROVAL**CHECK****DRAWN****DATE**

Robing

/

Zeng

2018/08/16

PART NO.

HRS-9026HV-XX-N0NC

TITLE

2.50mm Crimp Style Connectors

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000

DATE

REV



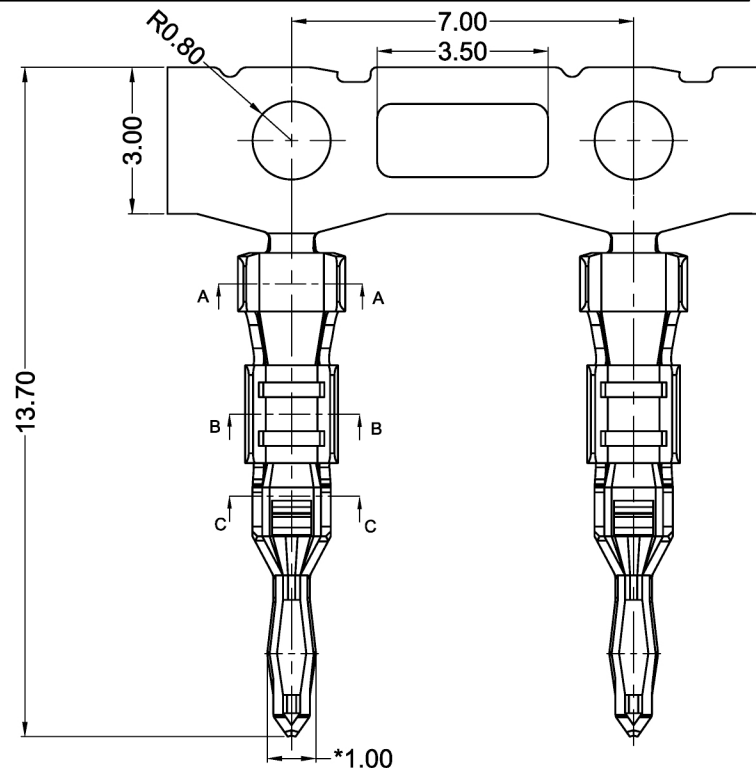


ECN NO.

DESCRIPTION


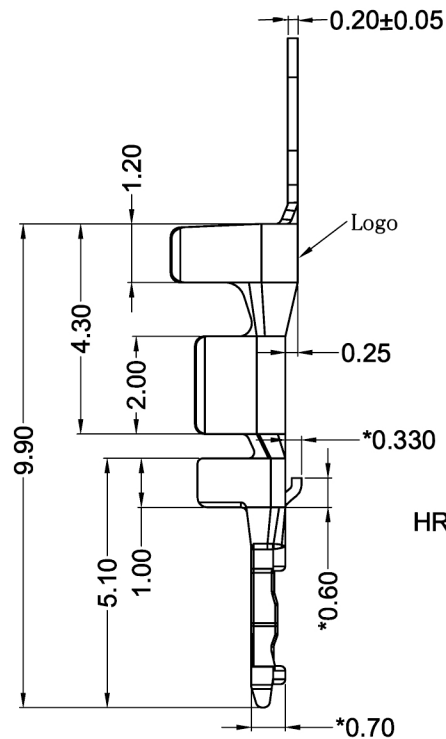
MODIFY

APPROVAL

RoHS

This products can apply to the HRS Doc NO. QA-3-04-005
of Environmental&Material Management RulesSECTION A-A
SCALE 1:1SECTION B-B
SCALE 1:1SECTION C-C
SCALE 1:1

2.50±0.05

Recommended P.C.B Layout
General Tolerance±0.05 T=1.60mm

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance:≥1000MΩ

- Wire Size:AWG#20~26(0.5~0.13m²)
- Insulation O.D.: 1.50mm (Max)
- Used In HRS Housing:HRS-9026HV

HRS-9026 T X V-X SN X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
 - ② Category: T-terminal
 - ③ Hape: L-Low Feet ; H-High Feet
 - ④ Hape: V-Straight 180°
 - ⑤ Material: B-Brass ; P-Phosphor bronze
 - ⑥ Plating style: SN-Bright tin plating
 - ⑦ Plating method: Blank-Stamping before plating
- Mold No./Mark/Special No. :

HRS-9026THV-XSN	AWG#20~22 0.50~0.35m ²	1.50mm (Max)	2.20	2.60	1.90	1.85
HRS-9026TLV-XSN	AWG#24~26 0.22~0.13m ²	1.30mm (Max)	2.20	2.60	1.30	1.40
P/N	Wire Range	Insulation O.D.	DIM a	DIM b	DIM c	DIM d

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

X.° ±2°

PROJECT

Horus Int. Electronics. Co., LTD.
Horus Int. Electronics. Co., LTD.

PART NO.

HRS-9026TXV-XSN

TITLE

2.50mm Crimp Style Connectors

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	A0	A-000

DATE

REV

ECN NO

DESCRIPTION

MODIFY

APPROVAL

APPROVAL

CHECK

DRAWN

DATE

Robing

/

Zeng

2021/11/22