

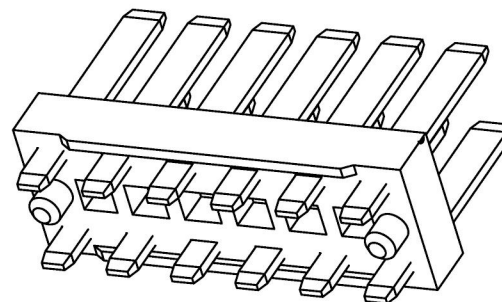
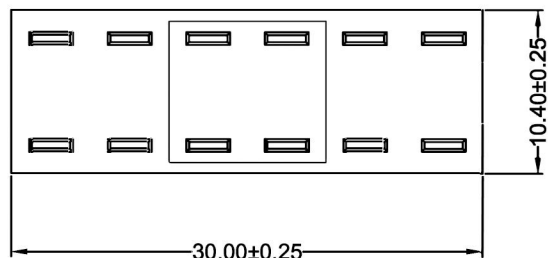


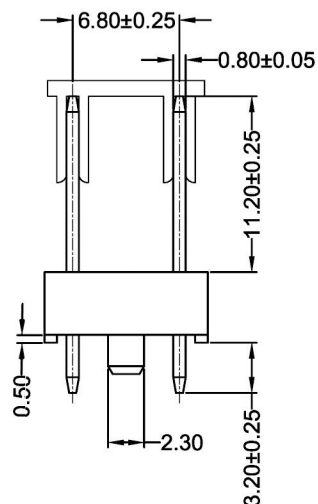

■ Specifications :

- Voltage rating: 250V Max. AC / DC
- Current rating: 3A Max.AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Max.processing temp: 260°C for 10seconds
- Insulating material:
High temp.Thermoplast UL94V-0
- Contat material: Copper Alloy
- Plating: Matte Tin

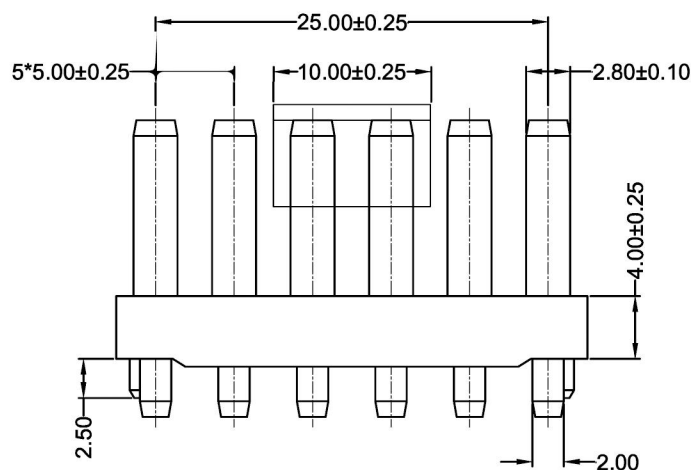

HRS-5001 W V X - 2*XX P - 9T XX X C - 01

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- ① Series No.
- ② Category: W-Wafer
- ③ Connector Type: V- 180°
- ④ Mounting Type: Blank-DIP
- ⑤ Row No.-Pin No.: 2*06-Double Row
- ⑥ Special No.: P-With Post Blank-Without Post
- ⑦ Material: 9T-PA9T 94V-0
- ⑧ Plating Category:
SW1-Matte Tin100u" Min. ; Ni 50u" Min.
- ⑨ Color:Blank-Black Color
- ⑩ Packing: C-Reel With CAP
- ⑪ 01-3,20/4.00/11.20

Recommended P.C.B Layout
General Tolerance ± 0.05

						GENERAL TOLERANCE	Horus Int. Electronics. Co., LTD. Horustech Electronics. Co., LTD.				PART NO. HRS-5001WV-2*06P-9TSW1C-01								
						.X ±0.30													
						.XX ±0.20													
						.XXX ±0.10													
2021/09/25	A1	/	增加掬料孔	卿 欣	杨 蒙	X.* ±2°					APPROVAL	CHECK	DRAWN	DATE	TITLE 5.00 mm Pin Header Connectors				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT 	Jason				Robing	Larry	2021/01/13	UNIT	SCALE	SHEET	REV	NUMBER	
														mm	3:1	1/1	A1	A-013	